

1. Electronic Safe Locks / Serrures électroniques pour coffres forts / Elektronische kluisloten


Tantum Basic / Tantum Basic anti drill / Tantum MLS / Tantum MLS anti drill
Motor lock / Serrures motorisées / Motorslot

EN The motorlock has four variants:

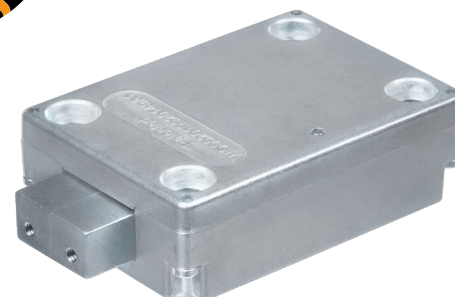
- **Tantum Basic**,
Motor lock with basic software
- **Tantum Basic anti drill**,
Motor lock with basic software and anti drill protection
- **Tantum MLS**,
Motor lock with multi level software
- **Tantum MLS anti drill**,
Motor lock with multi level software and anti drill protection

FR La serrure motorisée a 4 variantes:

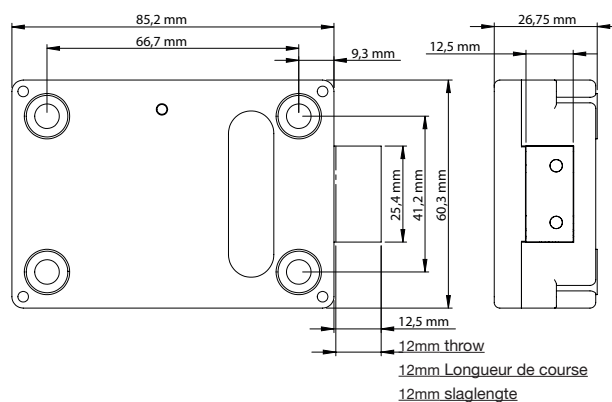
- **Tantum Basic**,
Serrure motorisée avec logiciel Basic
- **Tantum Basic anti drill**,
Serrure motorisée avec logiciel Basic avec protection de perçage
- **Tantum MLS**,
Serrure motorisée avec logiciel Multi Level Software
- **Tantum MLS anti drill**,
Serrure motorisée avec logiciel Multi Level Software avec protection de perçage

NL Het motorslot kent vier varianten:

- **Tantum Basic**,
Motorslot met basic software
- **Tantum Basic met boorbescherming**,
Motorslot met basic software en boorbescherming
- **Tantum MLS**,
Motorslot met multi level software
- **Tantum MLS met boorbescherming**,
Motorslot met multi level software en boorbescherming


TANTUM


Tantum Basic / Tantum Basic anti drill
Tantum MLS / Tantum MLS anti drill


TO BE COMBINED WITH / À COMBINER AVEC / TE COMBINEREN MET

EN Tantum Basic, Tantum Basic anti drill and Tantum MLS, Tantum MLS anti drill are compatible with the following entry-units:

FR Les Tantum Basic, Tantum Basic anti drill, Tantum MLS et Tantum MLS anti drill peuvent être combinées avec les claviers suivants:

NL Tantum Basic, Tantum Basic anti drill, Tantum MLS en Tantum MLS anti drill zijn te combineren met de volgende toetsenborden:

- AL20xx
- AL30xx
- Alpha II LED
- BR5010
- DE20xx
- DT2006
- EC10xx
- Echo Basic
- Echo Advance
- EK50xx
- PL3015
- ST40xx

CERTIFICATES / CERTIFICATS / CERTIFICATEN
Tantum Basic / Tantum Basic anti drill / Tantum MLS / Tantum MLS anti drill

VdS	Klasse 2
SBSC	Class B [SS3880:2015]
A2P	Class B
EN 1300	Class B
IMP	Klasa wyrobu –B

ACCESSORIES / ACCESSOIRES / ACCESSOIRES

	EN	FR	NL
283	Mounting plate	Plaque de montage	Montageplaat

Tantum Basic / Tantum Basic anti drill / Tantum MLS / Tantum MLS anti drill
Motor lock / Serrures motorisées / Motorslot

MECHANICS / MÉCANIQUE / MECHANISCH			
		Tantum Basic / Tantum Basic anti drill	Tantum MLS / Tantum MLS anti drill
EN	Opening	Automatic	Automatic
	Locking	Automatic / PTC	Automatic / PTC
	Blocking element	Motor	Motor
	Mounting dimensions	Standard	Standard
	Possible mounting positions	4	4
FR	Ouverture	Automatique	Automatique
	Fermeture	Automatique / Push to Close	Automatique / Push to Close
	Élément de blocage	Moteur	Moteur
	Dimensions de montage	Standard	Standard
	Positions de montage possible	4	4
NL	Openen	Automatisch	Automatisch
	Sluiten	Automatisch / PTC	Automatisch / PTC
	Blokkeer element	Motor	Motor
	Bevestigingsmaten	Standaard	Standaard
	Mogelijke montageposities	4	4

ELECTRONICS / ELEKTRONIK / ELEKTRONISCH				
		Tantum Basic / Tantum Basic anti drill	Tantum MLS / Tantum MLS anti drill	
EN	Power supply		9V Alkaline Duracell Procell- or Energizer battery	
	Software	Codes	2 (6 digits)	Up to 10 (6 or 7 digits)
		Manager Codes	1	1
		User Codes	1	Up to 9
		Time delay / open window	01-99 min / 01-19 min	01-99 min / 1-19 min
		Battery low signal	Yes	Yes
		Volume adjustable	Yes	Yes
		Silent alarm	Yes	Yes
		Dual mode	-	Yes
		Audit last 200 events	-	Yes
		Manipulation protection	5 minute lockout after 4 consecutive wrong codes	
FR	Alimentation électrique		Pile 9V Alkaline Duracell, Procell ou Energizer	
	Logiciel	Codes	2 (6 chiffres)	Jusqu'à 10 (6 ou 7 chiffres)
		Code Manager	1	1
		Codes utilisateurs	1	Jusqu'à 9
		Temporisation/fenêtre d'ouverture	01-99 Min / 01-19 Min	01-99 Min / 1-19 Min
		Signal piles faibles	Oui	Oui
		Volume réglable	Oui	Oui
		Alarme sous contrainte	Oui	Oui
		Ouverture conjointe	-	Oui
		Audit 200 événements	-	Oui-
		Protection contre la manipulation	À l'entrée de 4 codes erronés consécutifs, 5 minutes de pénalité	
NL	Stroomvoorziening		9V Alkaline Duracell Procell- of Energizer batterij	
	Software	Codes	2 (6 digits)	Tot 10 (6 of 7 digits)
		Managercodes	1	1
		Gebruikers codes	1	Tot 9
		Openingsvertraging / open venster	01-99 min / 1-19 min	01-99 min / 1-19 min
		Signaal zwakke batterij	Ja	Ja
		Regelbaar volume	Ja	Ja
		Stil alarm	Ja	Ja
		Dual mode	-	Ja
		Audit laatste 200 gebeurtenissen	-	Ja
		Manipulatieblokkering	Na 4 foutieve ingaves, 5 minuten blokkeerperiode	

2025.01 Errors and modifications reserved / Sous réserve de modifications et d'erreurs / Fouten en wijzigingen voorbehouden.